

電源自動復閉器

AUTOMATIC POWER RECLOSING RELAY



APR-100
APR-100R (RS-485 output)



Specifications

- Display :** 3 digits Red LED 0.3" high --- Voltage
2 digits Green LED 0.3" high --- Time
- Parameter setting :** Touch switches
- Memory :** NV RAM
- Accuracy :** ±1% FS. (Voltage)
- OV, UV delay time :** 0~99 sec free setting
- Reclose delay time :** 0~99 sec free setting
- Reclose times :** 1~9 times free setting
- Relay contact capacity :** AC 250V, 5A
- Input voltage :** AC 110/220V±20%
- Operating Temp. :** 0~60°C/ Below 90%R.H.
- Storage Temp. :** -10~70°C/ Below 80% R.H.
- Power Supply :** AC 90~260V, 50/60Hz
- Power Consumption :** Approx. 7VA
- Dielectric Strength :** DIN-IEC688, AC 2.3KV/1min, between terminal.
AC 2.8KV/1min, between terminal and case
- Isolation Resistance :** DC 500V, 100MΩ at above terminals
- Dimensions :** 144(W) × 144(H) × 100(D)mm

RS-485 Interface

- Address : 1 ~ 255
- Baudrate : 19200,9600,4800,2400
- Protocol : Modbus RTU Mode

Connection Diagram

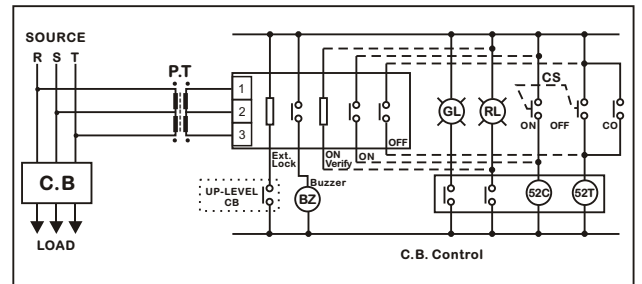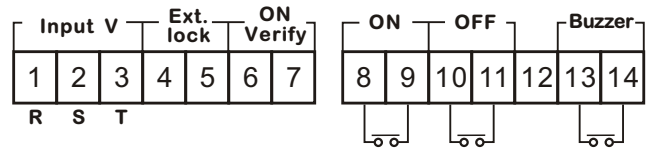

Dimensions (mm)

