


數字式電錶 3 1/2 DIGITAL PANEL METER

96 x 48mm

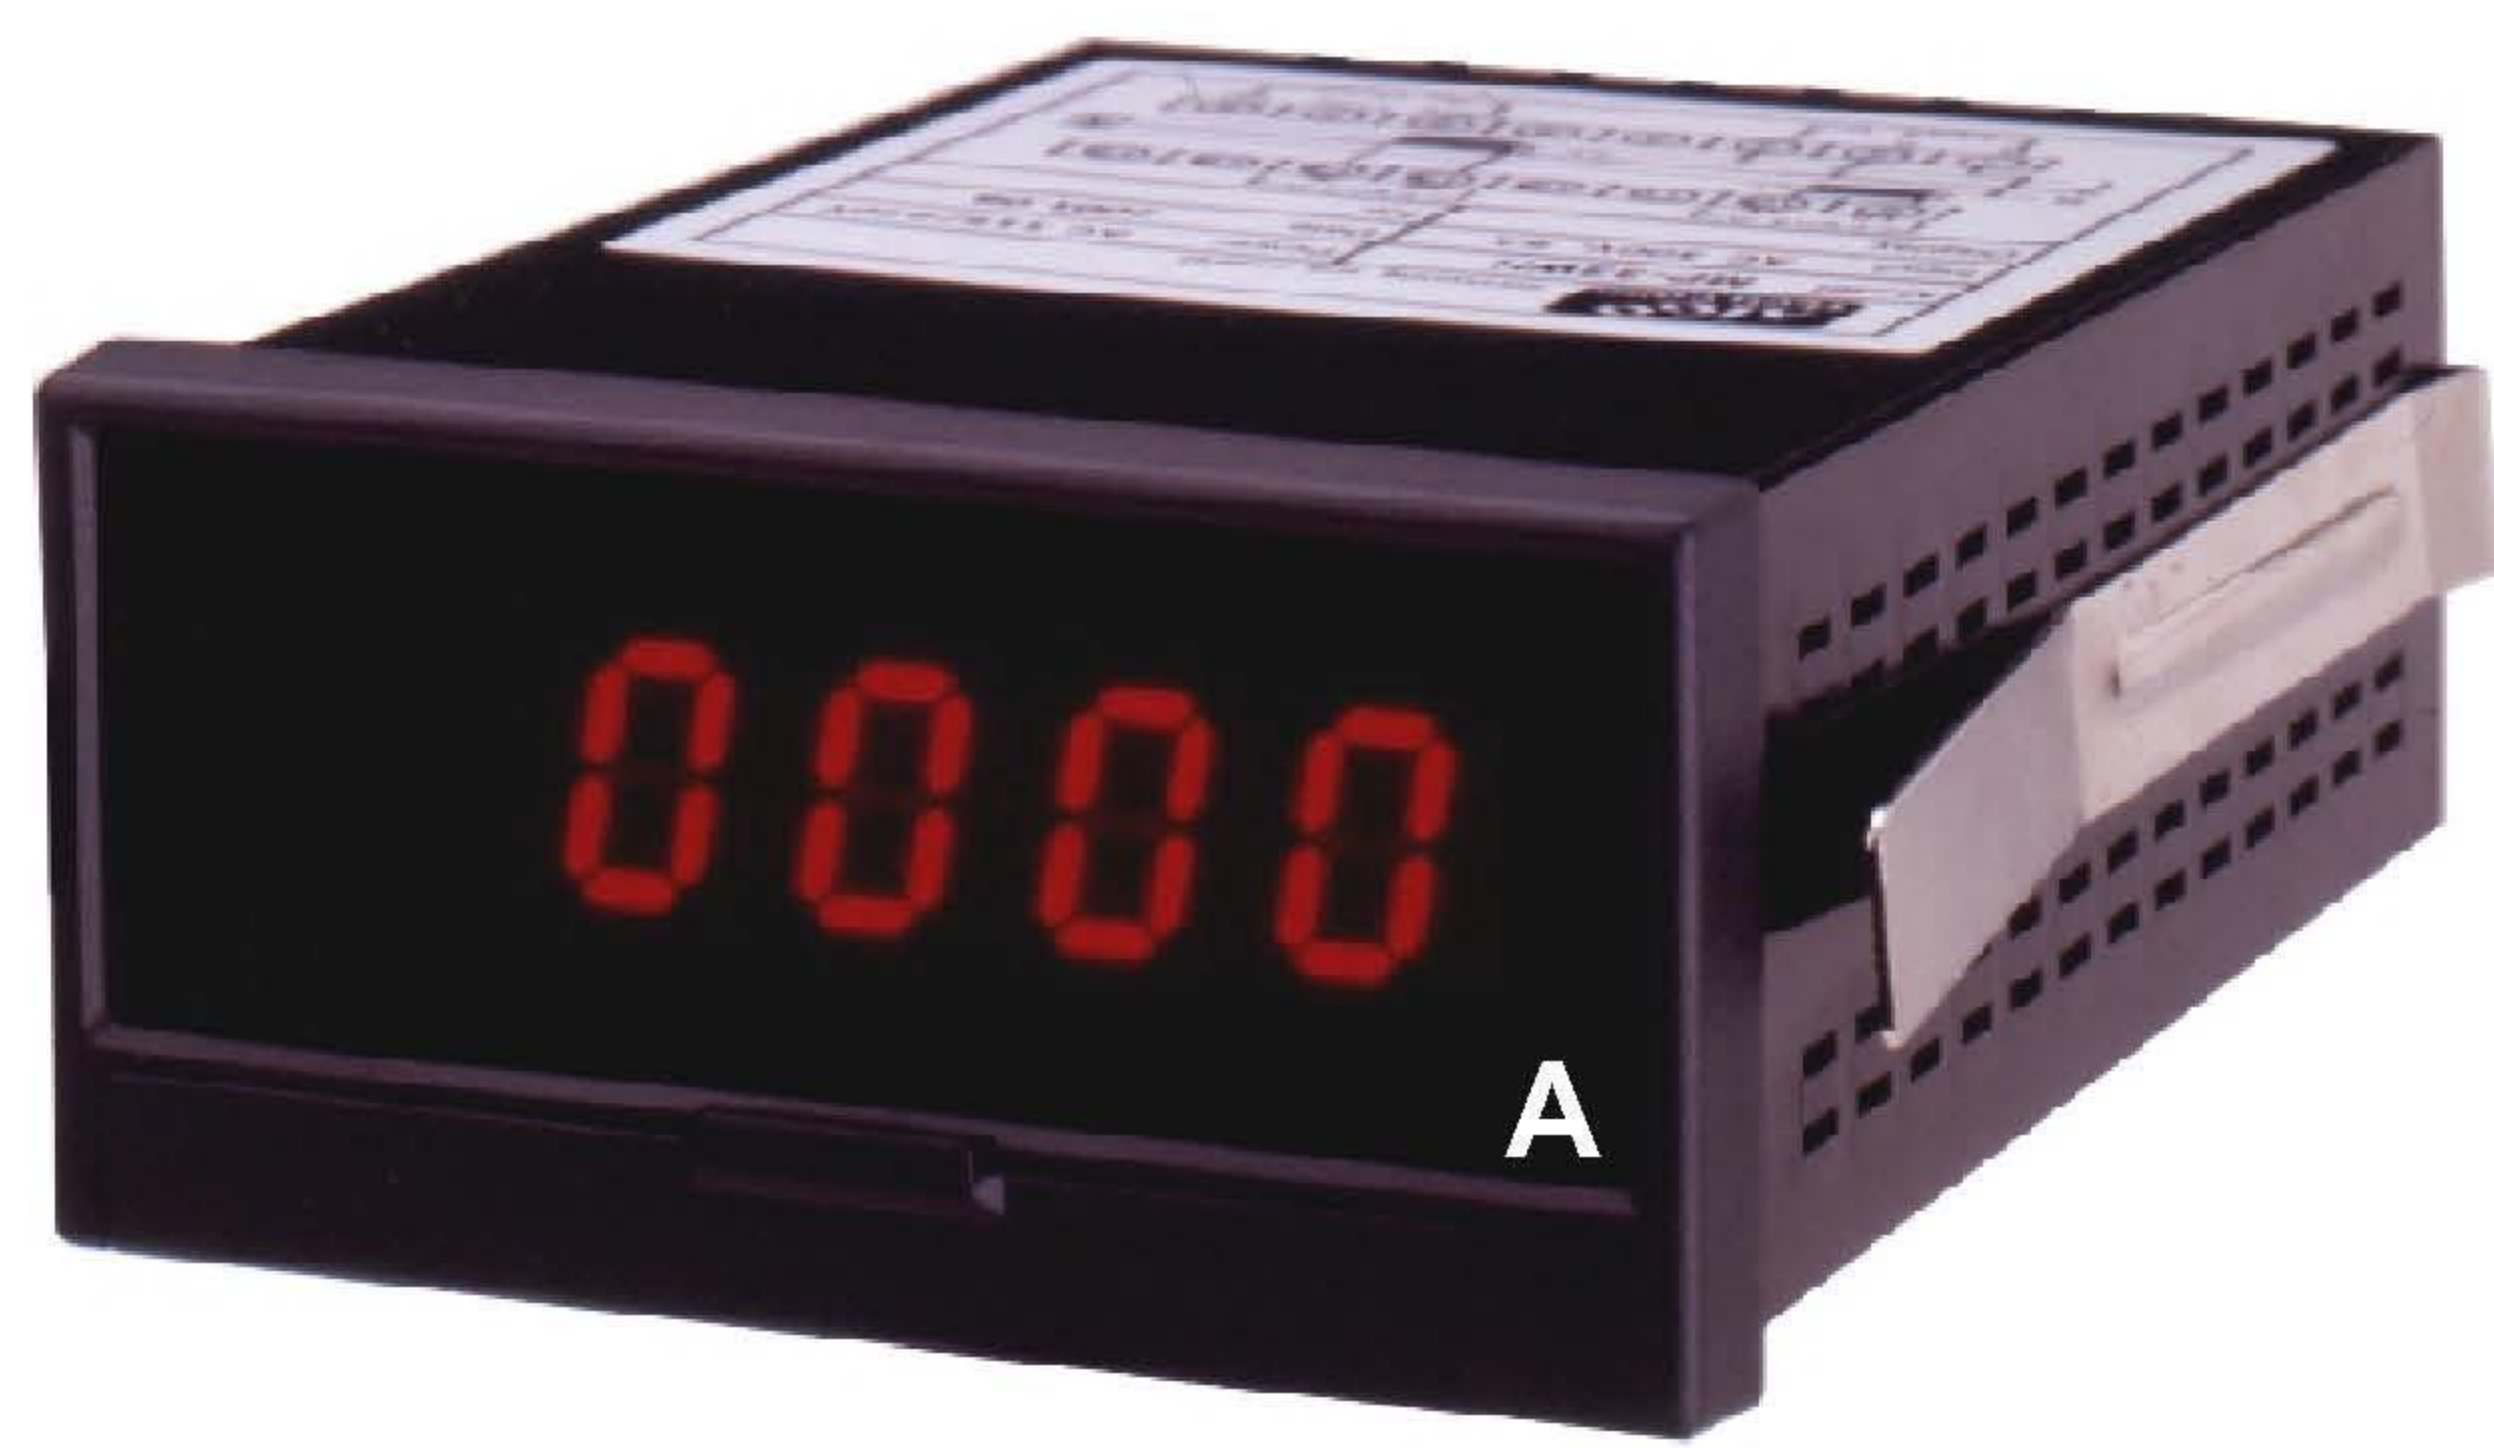

- DP - 32D** DC Voltage/Current Meter
- DP - 32A** AC Voltage/Current Meter
- DP - 32T** True RMS Voltage/Current Meter
- DP - 32C** RTD Temperature Meter

Features

- Measuring DC V/A, AC V/A
- Measuring RTD Temp. (DP-32)
- 4~20mA, 1~5V measurement


Specifications

- Display :** 3 1/2 digits (1999), 0.56" LED high
- Conversion Rate :** 2.5/sec.(DC) or 1/sec.(AC)
- Span Adjustment :** ±10%
- Polarity Display :** "-" symbol is displayed automatically
- Over range indication :** " 1 " or " -1 "
- Accuracy :** DC±0.1% FS.±1digit
(23±5°C) AC±0.25% FS.±1digit
RTD±0.2% FS.±1digit
- Operating Temp. :** 0~60°C/ Below 80%R.H.
- Storage Temp. :** -10~70°C/ Below 70% R.H.
- Power Supply :** AC 115/230V±10%, 50/60Hz
Option : DC 12, 24, 48, 120V±20%
- Power Consumption :** Approx. 2VA
- Weight :** Approx. 320g (DP-32)
- Dielectric Strength :** AC 1500V/1min (Input/Power)
- Insulation Resistance :** More than 100MΩ at 500VDC
- Dimensions :** 96(W) x 48(H) x 104(D)mm - - -DP-32


Panel Cut-Out : 91.5(W) x 44(H)mm - - -DP-32

Connection Diagram


Model : DP-32

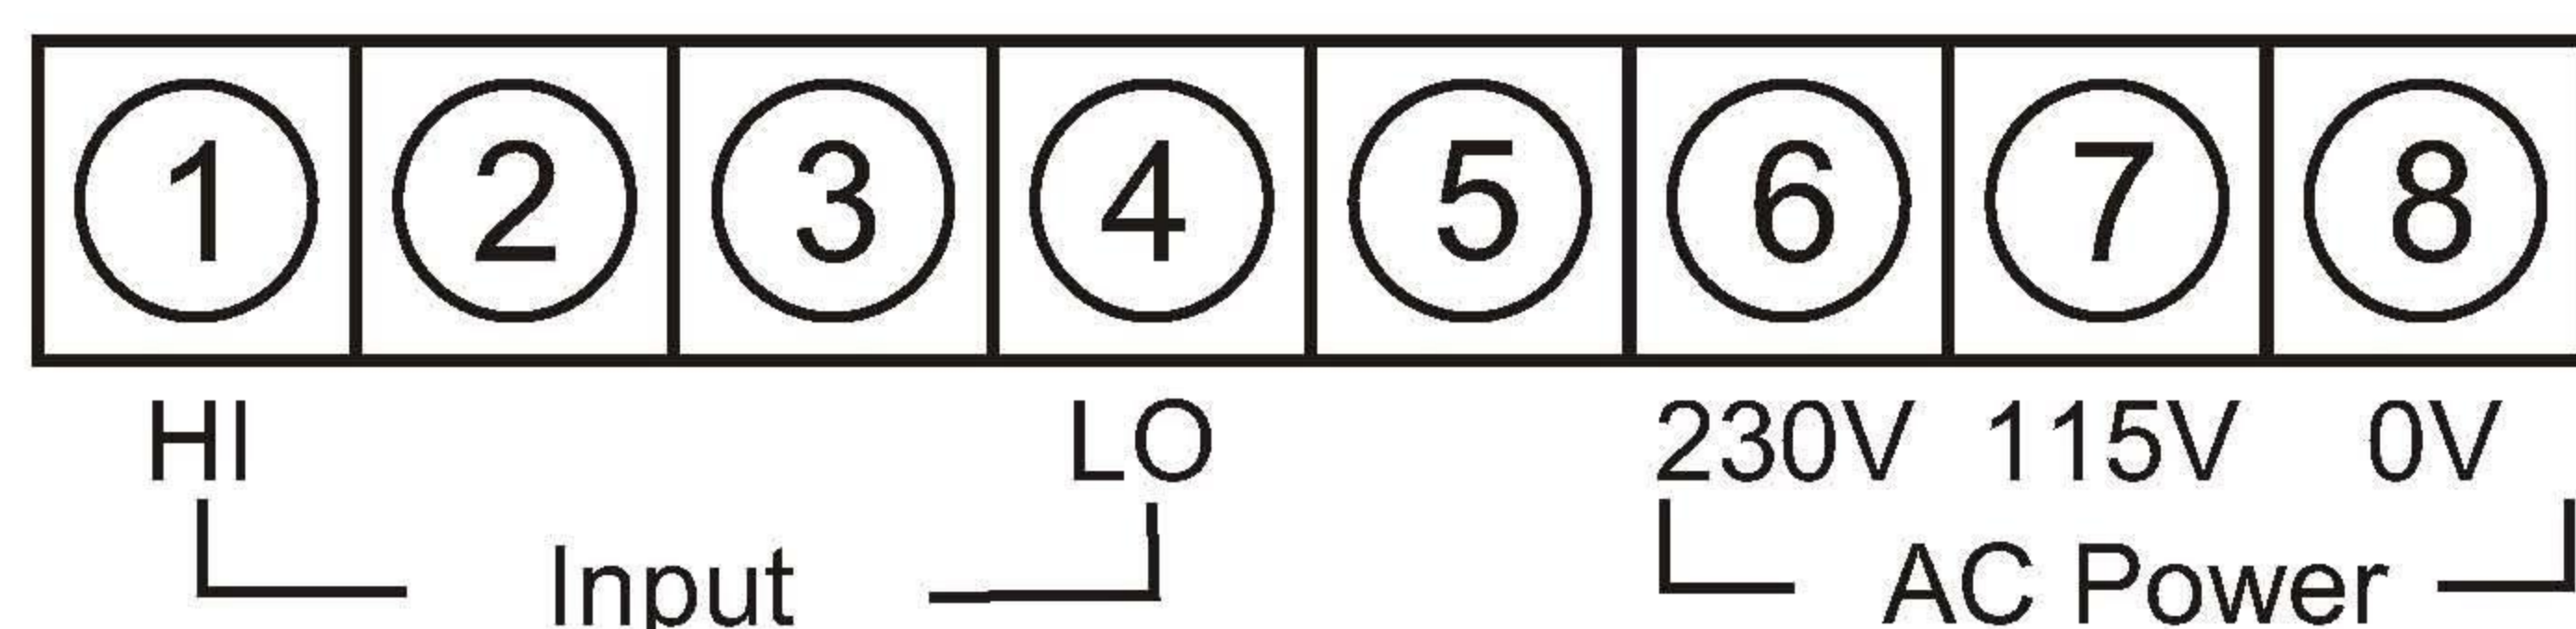

Model : DP-32C

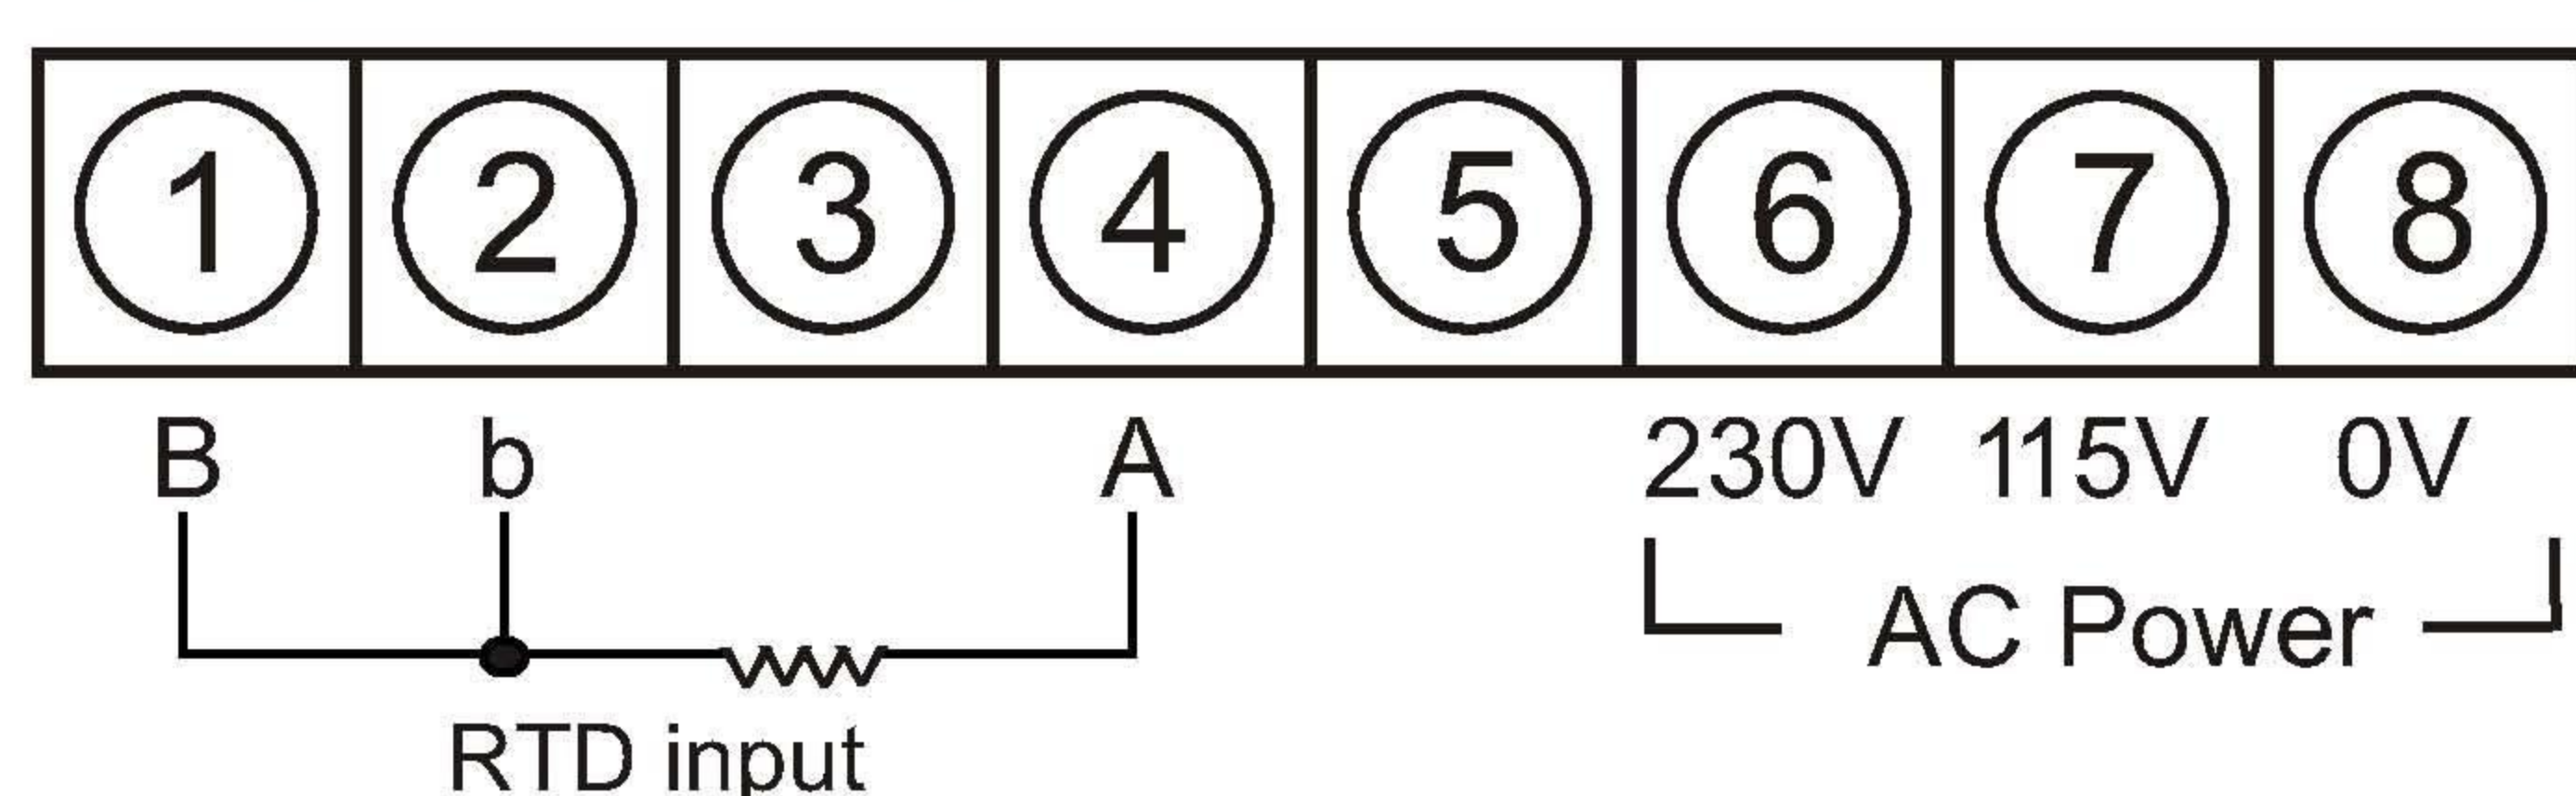

Order Code

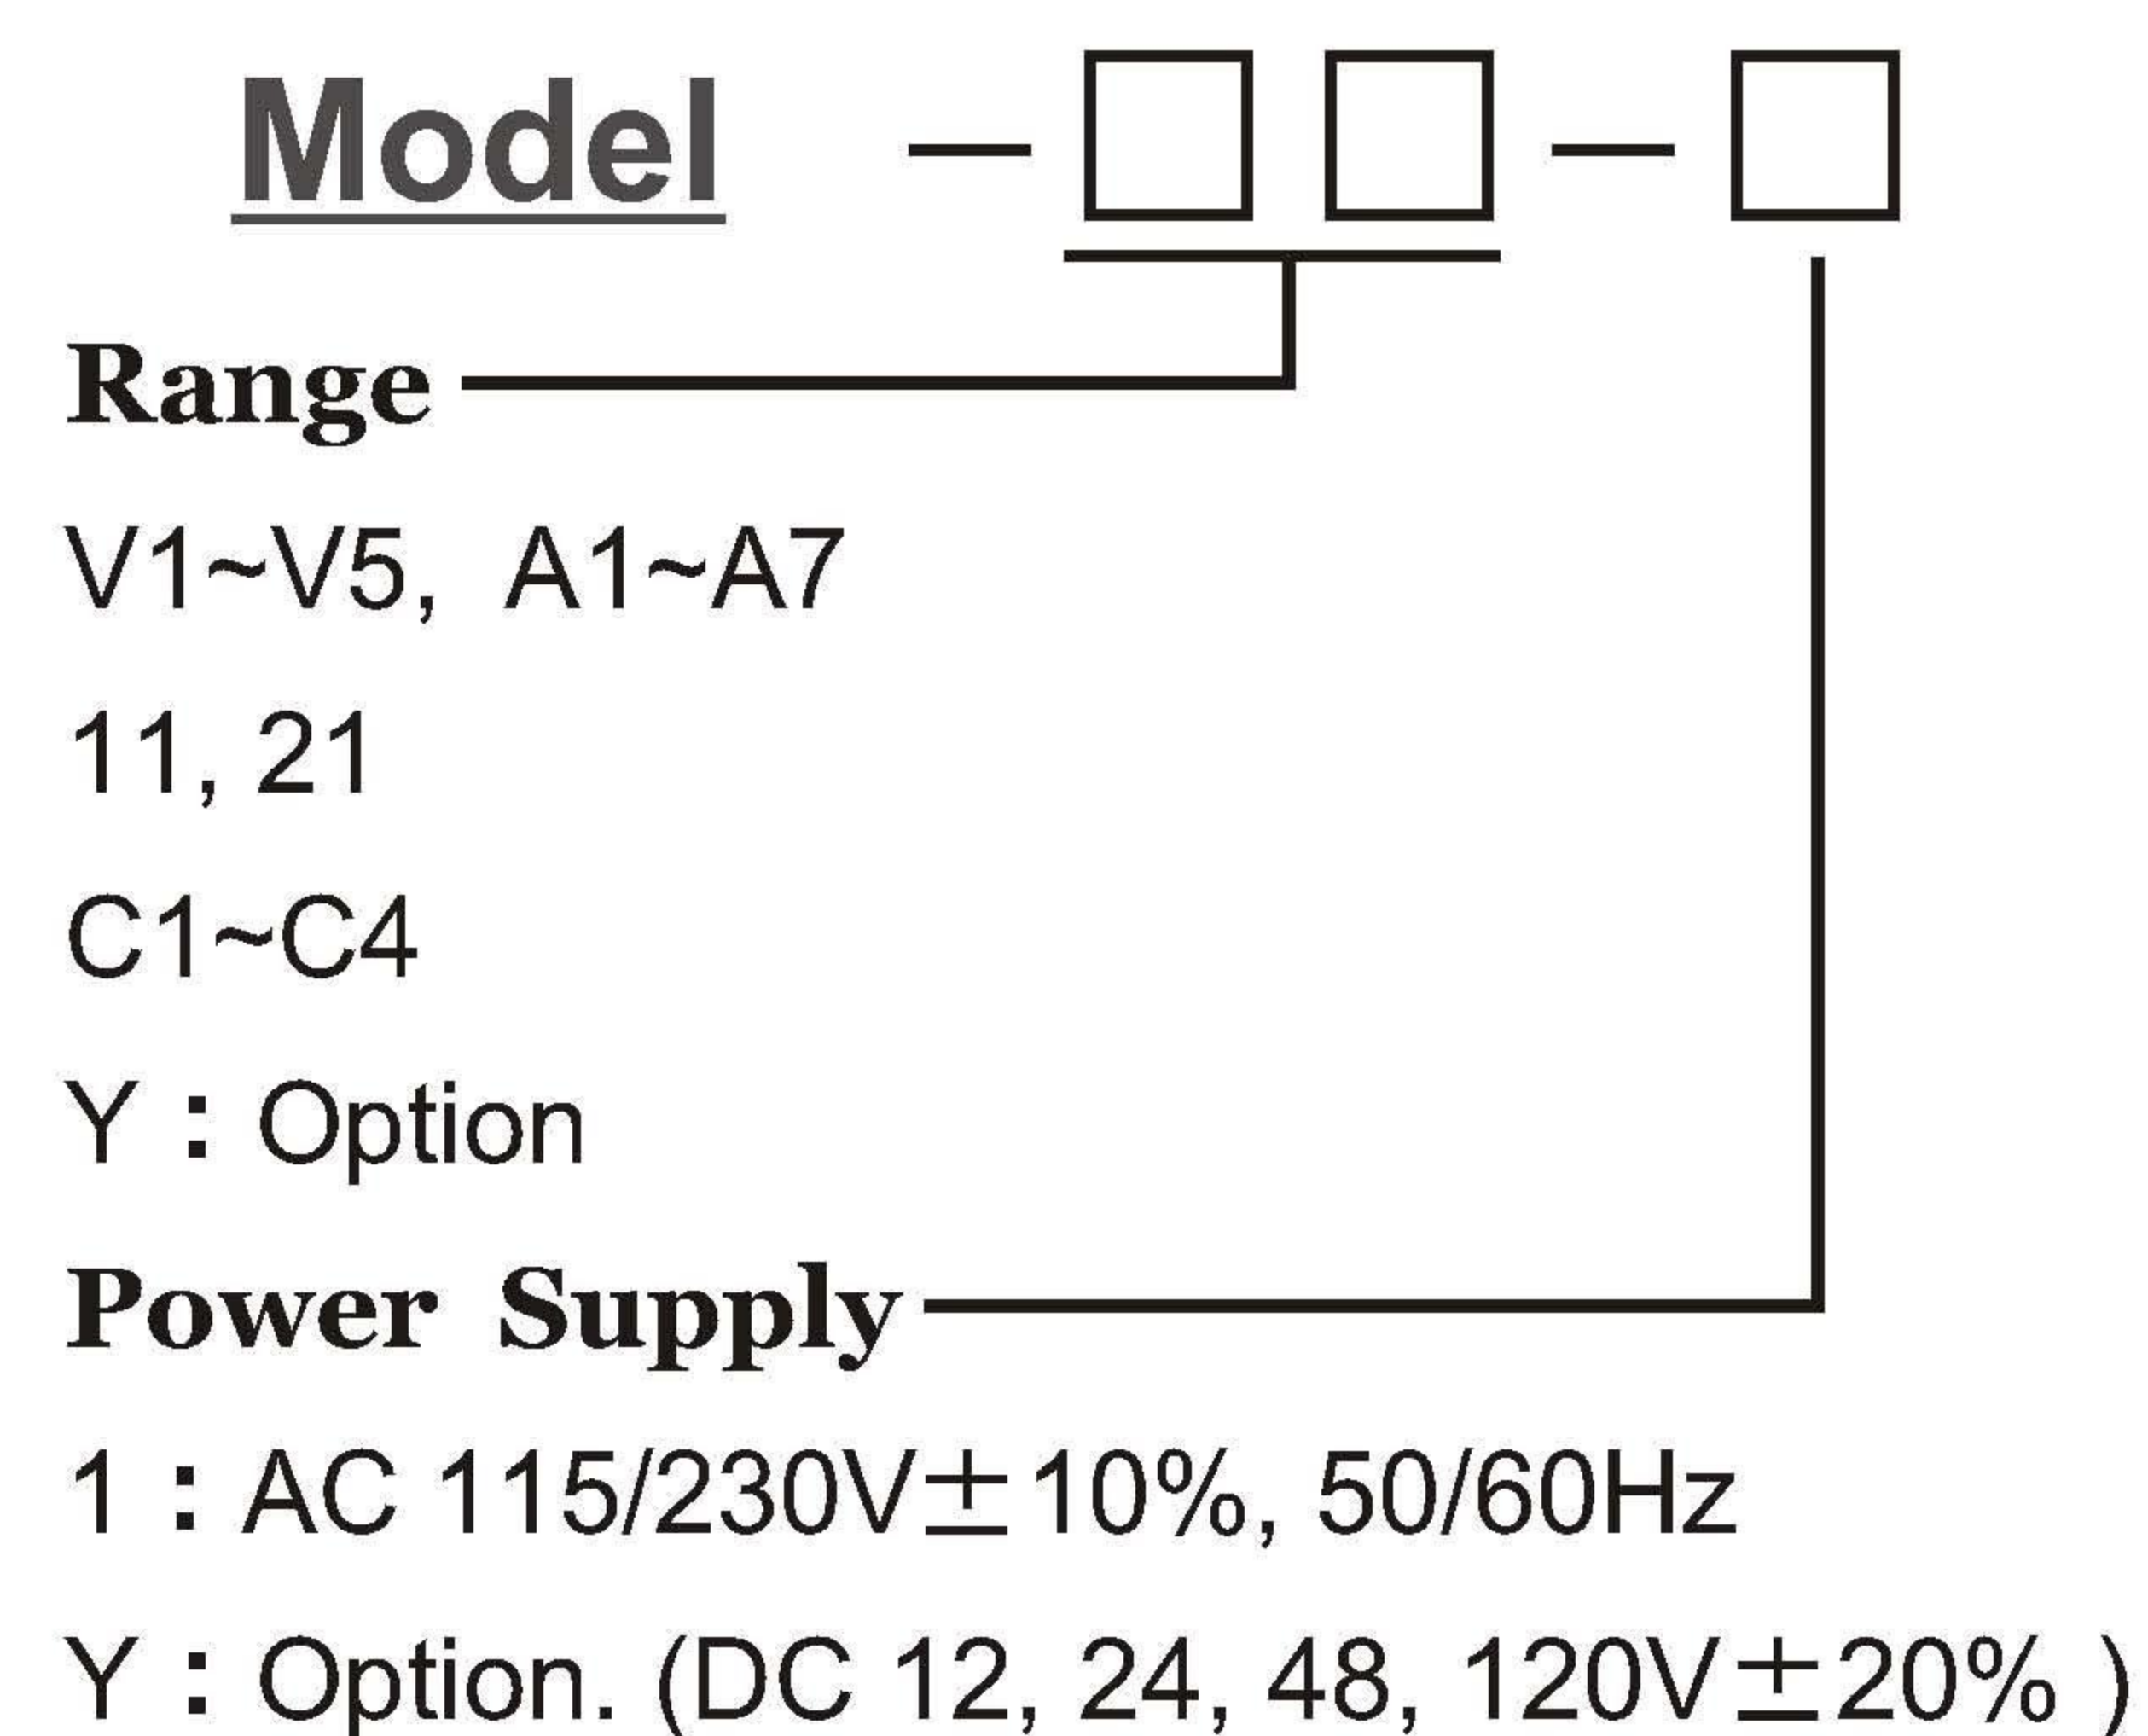

Measurement Item

Model : DP-32

Code	Range	Input Impedance	Input Protection
V1	0~199.9mV	100MΩ	100V
V2	0~1.999V	1MΩ	250V
V3	0~19.99V	1MΩ	500V
V4	0~199.9V	1MΩ	750V
V5	0~600V	1MΩ	750V
A1	0~199.9uA	1KΩ	100mA
A2	0~1.999mA	100Ω	300mA
A3	0~19.99mA	10Ω	500mA
A4	0~199.9mA	1Ω	1A
A5	0~1.999A	0.1Ω	5A
A6	0~5.00A	0.05Ω	10A
A7	0~10.00A	0.01Ω	20A
21	4~20mA (DC)	10Ω	200mA
11	1~5V (DC)	1MΩ	300V

Model : DP-32C

Code	Range	Sensor
C1	-100.0~100.0°C	PT-100 DIN - - - Standard (JIS - - - Option)
C2	0~100.0°C	
C3	0~199.9°C	
C4	0~400°C	