


Sheath Thermocouple

Specification

Thermocouple Wire	Sheath Outer Dia.						
	1.0Ø	1.6Ø	3.2Ø	4.8Ø	6.4Ø	8.0Ø	
C-A	Inconel 600						
C-A	SUS-316						
I-C	SUS-316						
	500°C	700°C	900°C	1000°C	1050°C	1100°C	Max. Working Temp.
	450	600	700	800	850	900	
	250	350	450	500			


Dimension

ST-30 With wire

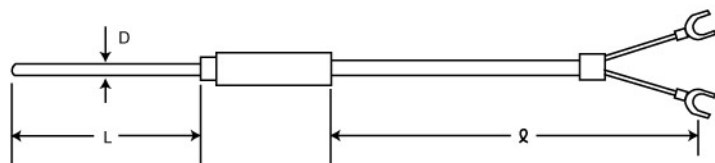


ST-60 With Thread Connection

ST-70 Without Thread Connection

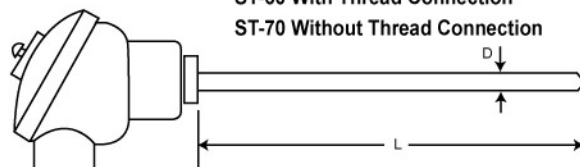

Ordering Information

Sheath thermocouple



A. Model : 30-with wire type

60-with T/C head type and with thread connection

70-with T/C head type and without thread connection

B. Signal type : K, J

C. Extension wire length : 1M, 2M, 3M, 4M, 5M, 6M & others (Q)

D. Extension wire type : Refer to compensating lead wire specification

E. Thread connection type : 1/4, 5/16, 3/8, 1/2, 3/4 & others

F. Tube diameter & length : 1.0Ø, 1.6Ø, 3.0Ø, 4.8Ø, 6.4Ø, 8Ø (D & L)