


## Recorder / Data Logger


### ■ Features

Display : 7" TFT, color depth : 65,536  
 Isolated : Power / RS-485 / Relay  
 Interface : Modbus RTU mode / USB / Ethernet




### Specifications


Model	HM-64
Appearance	
<b>Temperature</b>	
Port	6 points
Sensor	PT-100 Ω (3-wire)
Range	-50.0~150.0°C (-200~600°C --- option)
Accuracy	± 0.1% FS.
<b>Digital input (DI)</b>	
Port	4 points
NPN mode	DC 0V, -8mA
PNP mode	DC 24V, 8mA
<b>Relay output</b>	
Port	4 points
Contact capacity	5A, 250VAC / 30VDC
<b>Temperature/Humidity (Option)</b>	
Range	-30~130 °C, 0~100%RH
Humidity Accuracy	± 0.3 %
Temperature Accuracy	± 0.5°C
<b>Dimension</b>	
W x H x D	199.8 x 147.8 x 80.0 (mm)

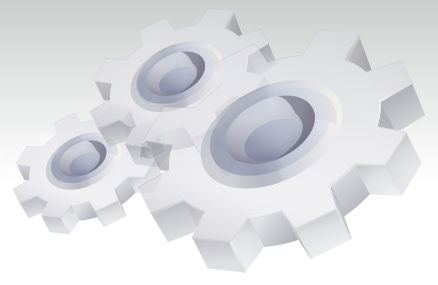

## Wiring Connection

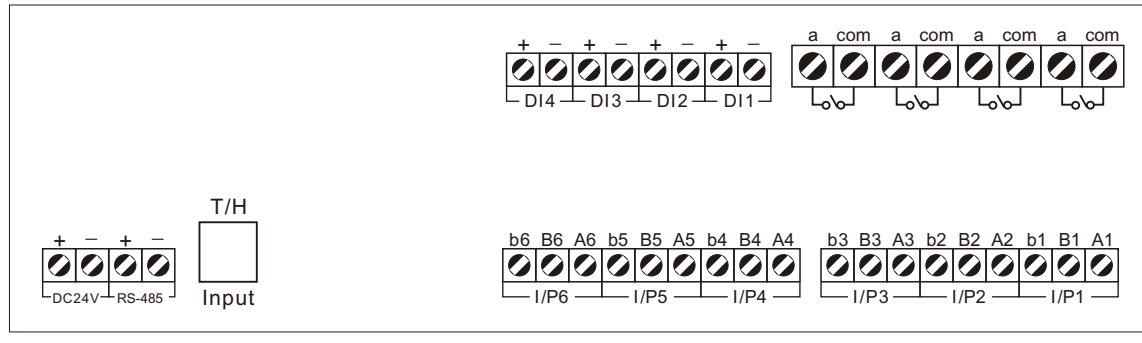

## Dimension

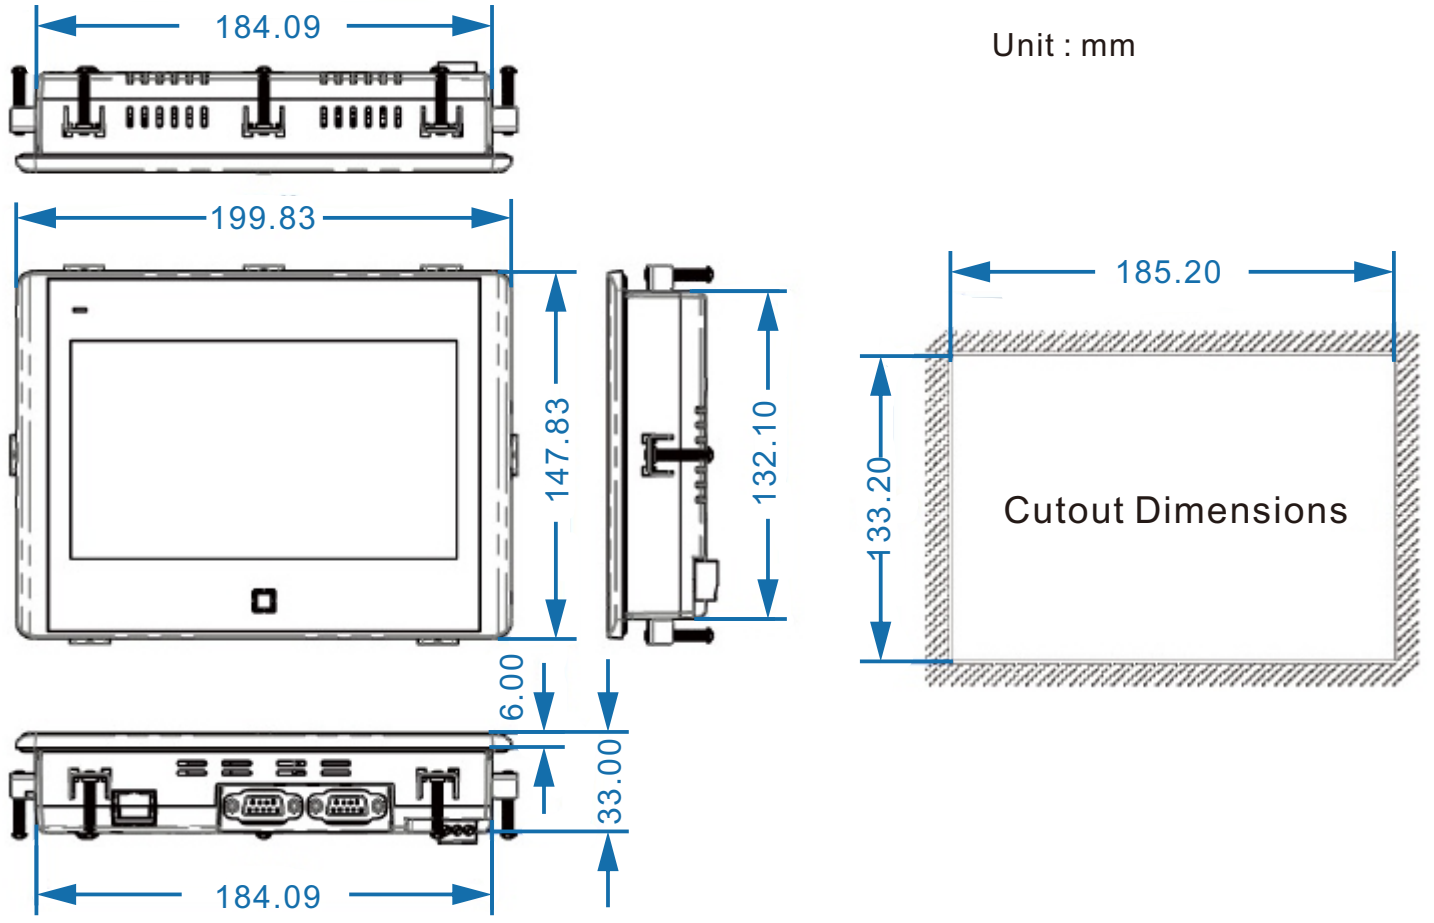



## Contact

### Head Office

Add: 11F., No.168, Jiankang Rd., Zhonghe Dist., New Taipei City 235, Taiwan

Tel: +886-2-2228-7950 (Rep.)

Fax: +886-2-2228-6140

E-mail : [service@maxthermo.com.tw](mailto:service@maxthermo.com.tw)

Web : [www.maxthermo.com](http://www.maxthermo.com)

### Showroom

Add: 3C25, Taipei World Trade Center, No. 5, Sec. 5, Hsin Yi Rd. Taipei Taiwan

Tel: +886-2-2720-6601

Fax: +886-2-2345-5120

### Thailand Office

Add: 86/132-133 m.7 Samaedum Bangkoontien 10150 Thailand.

Tel: +662-415-8318 , +662-417-2548-49

Fax: +662-415-8798

Web : [www.thaimaximum.com](http://www.thaimaximum.com)