


## Teflon Series Compensating Lead Wire

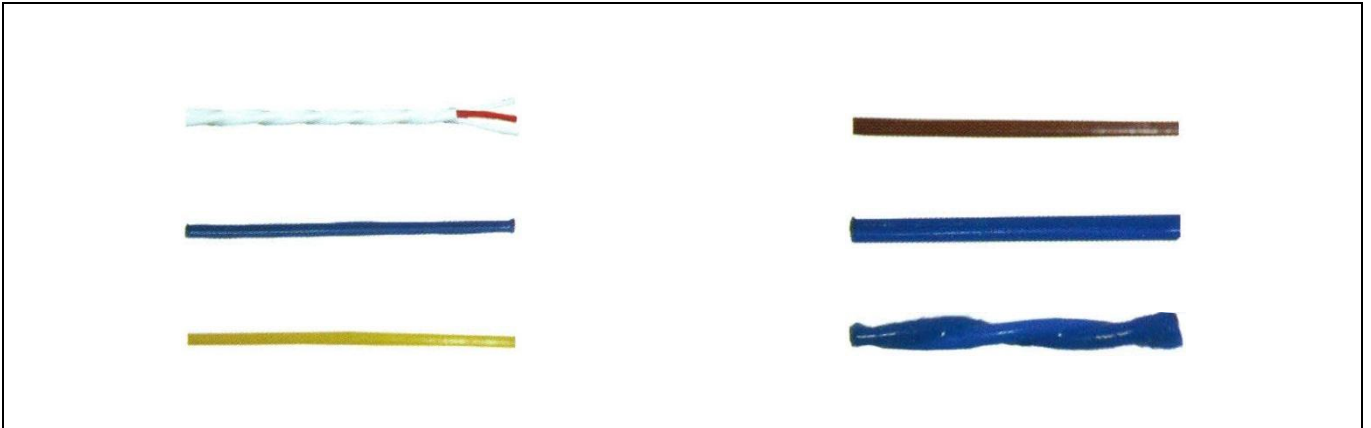

### Features

1. Color code: You can select ANSI, IEC, JIS.
2. Addition abrasion resistance: With stainless wire or tinned cooper wire over braids.
3. Excellent moisture and good chemical resistance.

## Performance









Continuous temperature: -90°F~400°F (-67°C~204°C).

Maximum temperature: 482°F (250°C).

## Applicable Range

Aerospace, Industrial equipment testing, Glass manufacture

## Standard Specification

Specification								
Model Number	Type	Conductor Size	Insulation		Operating Temp. Range	Wire Grade	Color Code Japanese Standard JIS C1610-1989	
			Individual Insulation	Overall Jacket			Lead (+) Red	Lead (-) White
RTD-Teflon	PT100	24AWG O.D.:2.6mm	Teflon	Teflon	0~200°C	RTD		
RTD-Teflon	PT100	24AWG O.D.:3.0mm	Teflon	Teflon	0~200°C	RTD		
K-Type Teflon	K	1/0.32X2	Teflon	Teflon	0~200°C	Thermocouple		
J-Type Teflon	J					Thermocouple		
T-Type Teflon	T					Thermocouple		
K-Type Teflon	K	1/0.65X2	Teflon	Teflon	0~200°C	Thermocouple		
K-Type Teflon	K	7/0.32X2	Teflon	Teflon	0~200°C	Thermocouple		
K-Type Teflon	K	19/0.12X2	Teflon	Teflon	0~200°C			

# Contact

## Taipei World Trade Center

Add: 3C25, Taipei World Trade Center, No. 5, Sec. 5, Hsin Yi Rd. Taipei Taiwan, R.O.C.

Tel: 886-2-27206601 (Rep.)

Fax: 886-2-23455120

E-mail: [gitta@ms9.hinet.net](mailto:gitta@ms9.hinet.net)

<http://www.maxthermo.com>

## Factory

Add: 11F., No.168, Jiankang Rd., Zhonghe City, Taipei County 235, Taiwan (R.O.C.)

Tel: 886-2-22287950 (Rep.)

Fax: 886-2-22286140

## Thailand Office - THAI MAXIMUM ELECTRONIC CO., LTD

Add: 86/132-133 m.7 Samaedum Bangkoontien Bangkok 10150 Thailand.

Tel: +662-415-8318 , +662-417-2548-49

Fax: +662-415-8798

<http://www.thaimaximum.com>