

BCD 輸入顯示器

BCD METER



BCD - 4 4 digits BCD Meter
BCD - 6 6 digits BCD Meter

Specifications



- Display :** Red LED 0.56" (14.2mm) high
- Max. Display :** 4 digits (9999) or 6 digits (999999)
- Operating Temp. :** 0~60°C/ Below 80%R.H.
- Storage Temp. :** -10~70°C/ Below 70% R.H.
- Power Supply :** DC 24V ±20%
- Power Consumption :** Approx. 3VA
- Weight :** Approx. 300g
- Dielectric Strength :** AC 1500V/1min (Input/Power)
- Insulation Resistance :** More than 100MΩ at 500VDC
- Dimensions :** 96(W) x 48(H) x 104(D)mm
- Panel Cut-Out :** 91.5(W) x 44(H)mm

Ture table


BCD Data				Digital cs		Flash	Latch	Display	
2-3	2-2	2-1	2-0	2-1	2-0			CD=1	CD=0
0	0	0	0	0	0	0	0	0	0
0	0	0	1	0	0	0	0	1	1
0	0	1	0	0	0	0	0	2	2
0	0	1	1	0	0	0	0	3	3
0	1	0	0	0	0	0	0	4	4
0	1	0	1	0	0	0	0	5	5
0	1	0	0	0	0	0	0	6	6
0	1	1	1	0	0	0	0	7	7
1	0	0	0	0	0	0	0	8	8
1	0	0	1	0	0	0	0	9	9
1	0	1	0	0	0	0	0	-	A
1	0	1	1	0	0	0	0	E	B
1	1	0	0	0	0	0	0	H	C
1	1	0	1	0	0	0	0	L	D
1	1	0	0	0	0	0	0	P	E
1	1	1	1	0	0	0	0		F
X	X	X	X	X	X	1	0	Flash	
X	X	X	X	X	X	X	1	Latch	

Connection Diagram

BCD-4

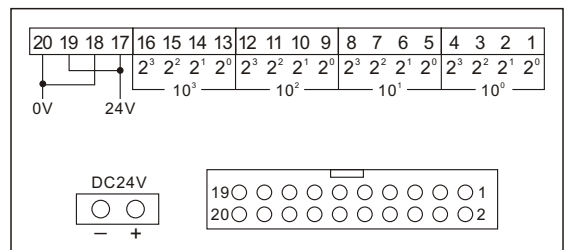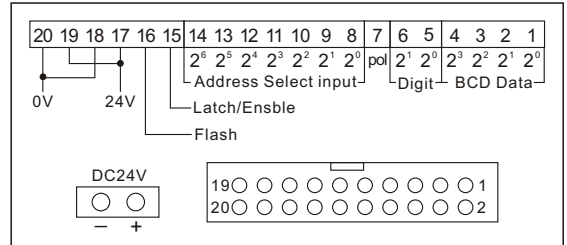

BCD-6

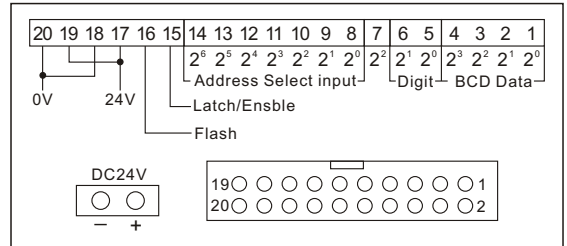

Dimensions

